

Series  
**VENTS VC**



In-line centrifugal duct fans with the air capacity up to **1880 m<sup>3</sup>/h**.

■ **Applications**

Supply and exhaust ventilation systems for various premises suitable for external surface mounting. For premises with high requirements to noise level, we offer units in low-noise modification (VC...Q).

■ **Design**

Fan casing is made of steel with polymeric coating. Various fan modifications for surface or flush mounting are available.

■ **Motor**




The plastic impeller with backward curved blades is powered by means of the single-phase motor with external rotor and overheating protection with automatic restart. For some dimension types high-powered motors are available (VC...S). Motor is equipped with ball bearings for longer service life designed for at least 40 000 hours. For precise features, safe operation and low noise, each turbine is dynamically balanced while assembly. Motor protection rating IP 44.

■ **Speed control**

Smooth or step speed control is performed with the thyristor or autotransformer controller. Several fans can be connected to one controller in case the total power and operating current do not exceed the controller rated values.

■ **Mounting**

Fan is designed for surface wall mounting (VC...PN and VC...VN models) or through-the-wall mounting (VC...PK and VC...VK) depending on design modification (see below). The fan is mounted to the wall with the mounting plate. The fan is powered through the external terminal box. Electric connection and installation shall be performed in compliance with the manual and wiring diagram on the terminal box.

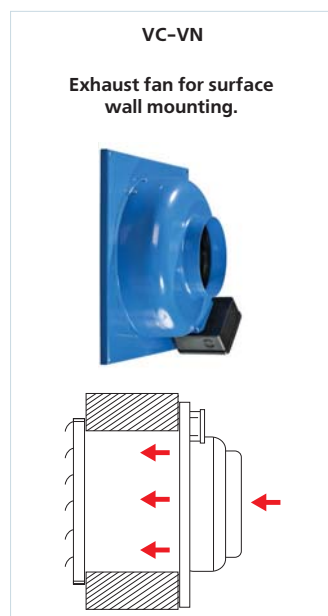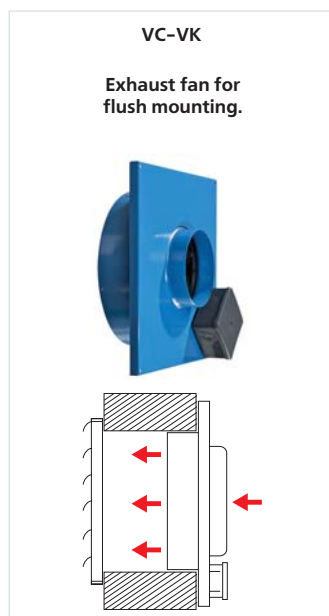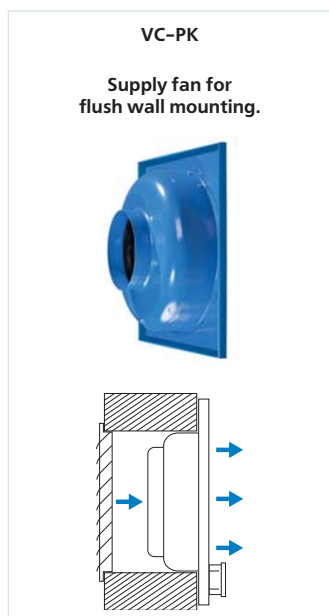

**Designation key:** \_\_\_\_\_

Fan series	*Option	Modification	Mounting options	Flange diameter	Additional options
<b>VENTS VC</b>	<b>S</b> – high-powered motor;	<b>V</b> - exhaust; <b>P</b> - supply	<b>N</b> - surface wall mounting; <b>K</b> - through-the-wall duct mounting	100; 125; 150; 160; 200; 250; 315	<b>Q</b> - low-noise application

**Accessories**



page 240    page 248    page 250    page 254    page 262    page 294    page 296    page 310    page 310    page 311    page 314    page 315

**Technical data:**


	VC 100 Q	VC 100	VC 125 Q	VC 125	VC 150	VC 160
Voltage [V / 50 Hz]	230	230	230	230	230	230
Power [W]	60	73	60	75	98	98
Current [A]	0,37	0,32	0,37	0,33	0,43	0,43
Maximum air flow [m³/h]	210	270	255	355	555	555
RPM [min <sup>-1</sup> ]	2620	2830	2535	2800	2705	2660
Noise level at 3 m [dBA]	36	47	36	47	47	47
Maximum operating temperature [°C]	-25 +55	-25 +55	-25 +55	-25 +55	-25 +55	-25 +55
Protection rating	IP X4	IP X4	IP X4	IP X4	IP X4	IP X4

**Technical data:**



	VC 200	VCS 200	VC 250 Q	VC 250	VC 315	VCS 315
Voltage [V / 50 Hz]	230	230	230	230	230	230
Power [W]	154	193	158	194	171	296
Current [A]	0,67	0,84	0,69	0,85	0,77	1,34
Maximum air flow [m³/h]	950	1100	1190	1310	1400	1880
RPM [min <sup>-1</sup> ]	2375	2780	2315	2790	2600	2720
Noise level at 3 m [dBA]	48	51	52	52	52	54
Maximum operating temperature [°C]	-25 +50	-25 +45	-25 +50	-25 +50	-25 +50	-25 +45
Protection rating	IP X4	IP X4	IP X4	IP X4	IP X4	IP X4

**Fan overall dimensions:**

Type	Dimensions [mm]						Mass [kg]
	∅D	∅D1	∅d	H	H1	L	
VC 100 Q	98	249	6,1	310	295	115	3,1
VC 100	98	249	6,1	310	295	115	3,2
VC 125 Q	123	249	6,1	310	295	115	3,1
VC 125	123	249	6,1	310	295	115	3,2
VC 150	149	300	6,1	400	385	115	4,8
VC 160	159	300	6,1	400	385	115	4,9
VC 200	198	339	6,1	400	385	138	6,1
VCS 200	198	339	6,1	400	385	138	6,1
VC 250 Q	248	339	6,1	400	385	138	7,1
VC 250	248	339	6,1	400	385	138	7,2
VC 315	315	399	6,1	460	445	146	7,8
VCS 315	315	399	6,1	460	445	180	7,8

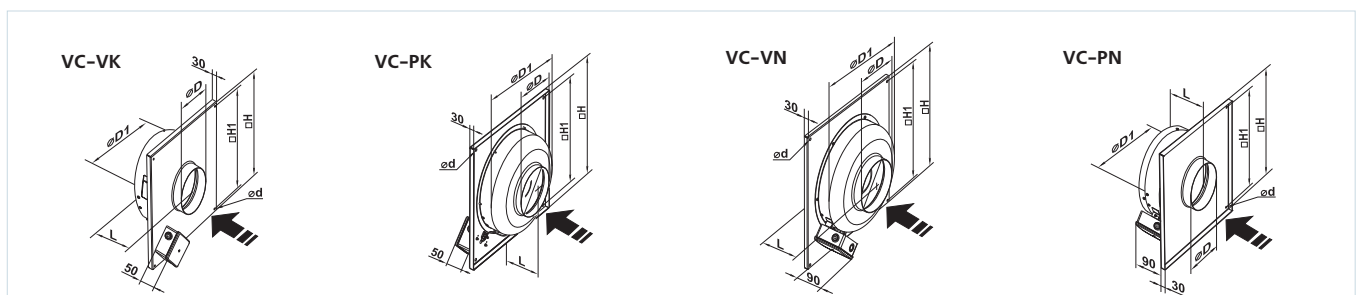

VENTS VC

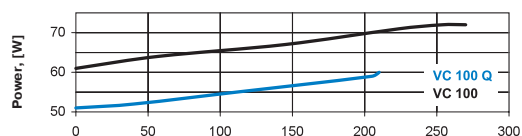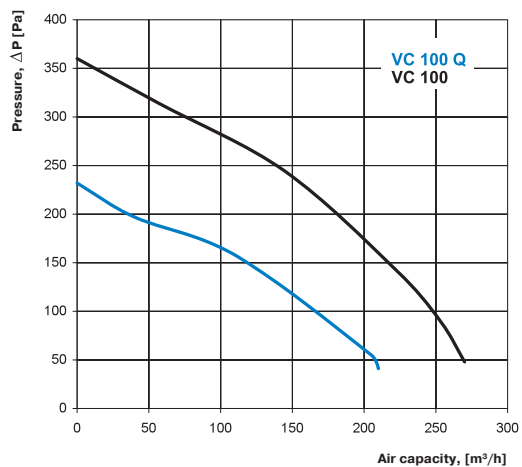



VC 100 Q

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
$L_{WA}$ to inlet	dBA	62	52	60	56	60	48	48	41	28
$L_{WA}$ to outlet	dBA	67	49	57	58	60	54	52	45	30
$L_{WA}$ to environment	dBA	55	19	16	23	36	39	42	30	19

VC 100

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
$L_{WA}$ to inlet	dBA	74	49	66	70	67	62	53	52	40
$L_{WA}$ to outlet	dBA	77	48	69	73	68	61	57	53	47
$L_{WA}$ to environment	dBA	63	43	63	57	40	27	6	20	25

VENTS VC

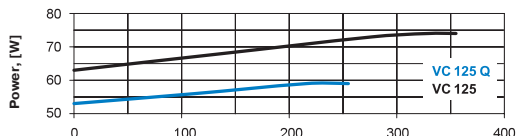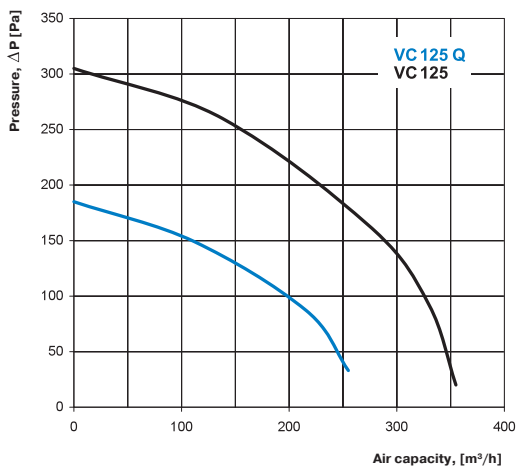



VC 125 Q

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
$L_{WA}$ to inlet	dBA	61	32	53	55	55	49	45	36	30
$L_{WA}$ to outlet	dBA	58	37	54	57	54	52	50	36	34
$L_{WA}$ to environment	dBA	64	44	64	59	41	32	15	32	26

VC 125

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
$L_{WA}$ to inlet	dBA	75	57	65	67	70	66	61	53	42
$L_{WA}$ to outlet	dBA	76	63	69	66	68	70	65	52	42
$L_{WA}$ to environment	dBA	65	54	60	59	46	36	21	29	25

VENTS VC

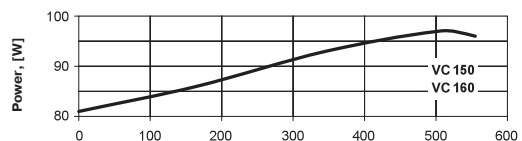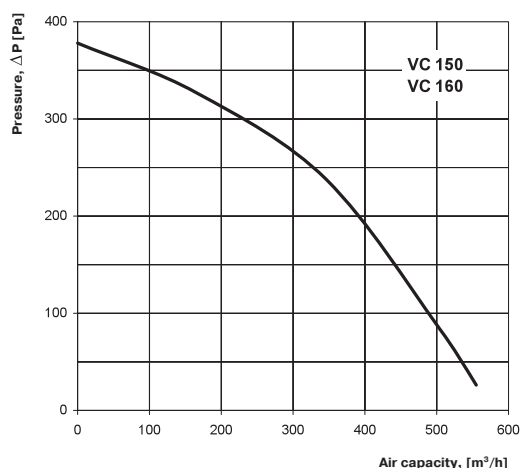



VC 150

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
$L_{WA}$ to inlet	dBA	70	45	66	64	67	61	59	50	38
$L_{WA}$ to outlet	dBA	71	48	69	67	65	67	62	53	42
$L_{WA}$ to environment	dBA	62	39	62	54	39	19	17	28	20

VC 160

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
$L_{WA}$ to inlet	dBA	72	44	64	64	63	61	59	48	35
$L_{WA}$ to outlet	dBA	72	43	66	68	66	65	63	50	42
$L_{WA}$ to environment	dBA	64	42	59	55	36	18	15	30	22

VENTS VC

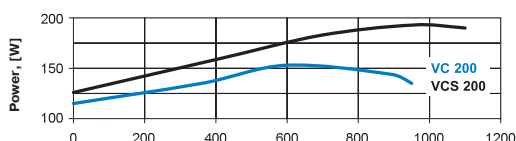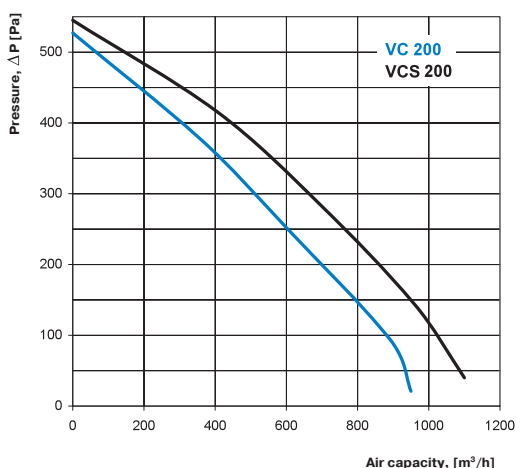

VC 200

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
$L_{WA}$ to inlet	dBA	77	47	68	67	72	67	59	59	50
$L_{WA}$ to outlet	dBA	76	53	69	71	73	69	67	62	52
$L_{WA}$ to environment	dBA	64	46	61	57	50	33	26	44	39

VCS 200

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
$L_{WA}$ to inlet	dBA	73	47	70	72	71	64	63	58	51
$L_{WA}$ to outlet	dBA	80	52	70	75	72	64	64	62	54
$L_{WA}$ to environment	dBA	64	49	66	61	47	33	29	45	42

