


GLOBE VALVE – BRASS TRIM

DN15–DN200

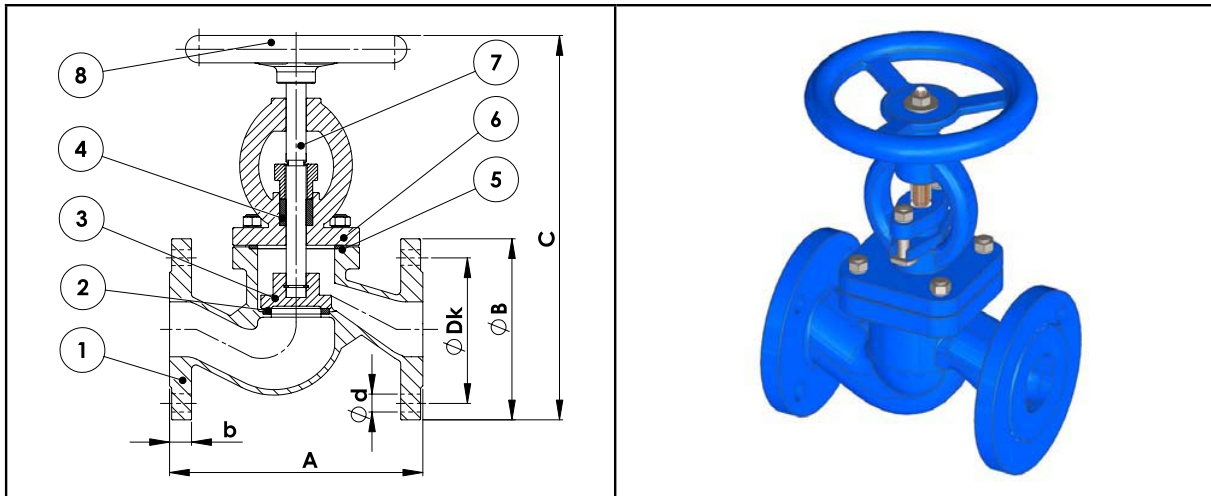

Working temperature 0 °C/130 °C

Materials

1	Body	Cast Iron – GG25
2	Seat Ring	Brass
3	Disc	Cast Iron – GG25, Brass gasket
4	Packing	Graphite
5	Bonnet Gasket	Graphite
6	Bonnet	Cast Iron – GG25
7	Stem	Stainless Steel – A410
8	Handwheel	Cast Iron – GG25

PN6

Art. nr.	DN	A	ØB	C	b	ØDk	n-Ød	Weight (kg)
A026828	15	130	80	185	12	55	4-12	2,9
A026829	20	150	90	195	14	65	4-12	3,4
A026830	25	160	100	225	14	75	4-12	4,4
A026831	32	180	120	235	16	90	4-14	5,2
A026839	40	200	130	260	16	100	4-14	8,2
A026840	50	230	140	305	16	110	4-14	10,7
A026841	65	290	160	310	16	130	4-14	15,5
A026842	80	310	190	350	18	150	4-18	20,1
A026843	100	350	210	380	18	170	4-18	30,0
A026844	125	400	240	430	20	200	8-18	45,0
A026845	150	480	265	490	20	225	8-18	58,5
A026846	200	600	320	630	22	280	8-18	114,5

PN16

Art. nr.	DN	A	ØB	C	b	ØDk	n-Ød	Weight (kg)
A019428	15	130	95	185	14	65	4-14	3,0
A019429	20	150	105	195	16	75	4-14	3,9
A019430	25	160	115	225	16	85	4-14	4,8
A019431	32	180	140	235	18	100	4-18	7,2
A019432	40	200	150	260	18	110	4-18	9,2
A012304	50	230	165	305	20	125	4-18	14,3
A016474	65	290	185	310	20	145	4-18	18,1
A016476	80	310	200	350	22	160	8-18	22,3
A016475	100	350	220	380	24	180	8-18	34,7
A012595	125	400	250	430	26	210	8-18	46,6
A016477	150	480	285	490	26	240	8-23	62,6
A016478	200	600	340	630	30	295	12-23	123,4

Notes

Face to face dimensions conform to DIN3202 F1.

